


M-800-CT-25

WHEELBARROW WHEEL

Puncture proof PU wheelbarrow wheel with steel rim

M-800-CT puncture-proof wheelbarrow wheel with steel rim.

- Puncture proof (foamed Polyurethane).
- High density care free tyre.
- Steel rim with double closed ball bearings.
- Ø20mm axle.
- Axle length 250mm.
- Indestructible and stays on course.
- Capacity: 200 Kg.
- Rim is completely powder-coated in gray. Resistant powder coating. (no solvents, less harmful to the environment).

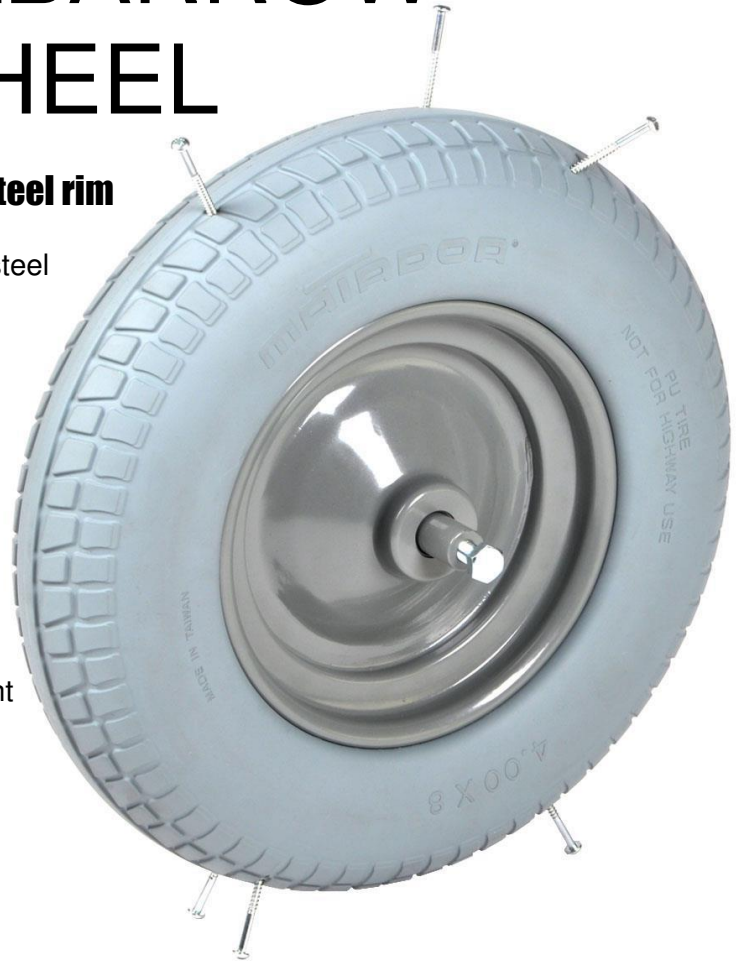

- Puncture proof (foamed Polyurethane).
- High density care free tyre.
- Steel rim with double closed ball bearings.
- Ø20mm axle.
- Axle length 250mm.
- Indestructible and stays on course.



12219
M-800-CT-25

Cap. (kg)	Dimensions ØxW (mm)	Weight (kg)	Axle length	Axle Ø mm	Tyre	Material tyre	Material rim	Article	Art. nr.
200	400-8/16x4" 400x100	4,8	250	20	Puncture proof	PU (foamed Polyurethane)	Steel, gray powdercoated	M-800-CT-25	12219